



Intesis[®]
BY HMS NETWORKS

INWMPPAN001R000
PA-RC2-WMP-1

Wi-Fi interface for Panasonic ECOi and PACi lines

1. Introduction

Intesis INWMPPAN001R000 (PA-RC2-WMP-1) allows a complete and natural integration of Panasonic Air Conditioners into IP based control systems. Compatible with ECOi and PACi Air Conditioners commercialized by Panasonic.

- Quick and easy installation.
- Direct communication to the smart hub or home's IP based control system.
- Direct connection to the AC indoor unit.
- Total Control and Supervision.
- Real states of the AC unit's internal variables.
- Allows using Panasonic's wired remote controller simultaneously.
- Compatible with 802.11 b/g/n (802.11n up to 150 Mbps)

2. Dimensions

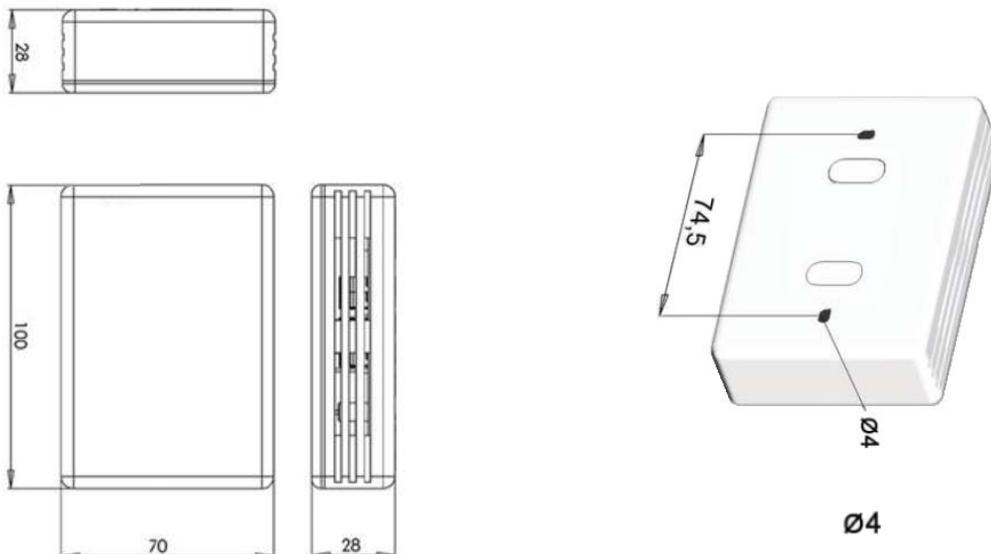


Figure 2.1 Device dimensions in mm and back view with fixing holes

3. Technical Features

Enclosure	ABS (UL 94 V-0). 2,5 mm thickness
Dimensions	70 x 100 x 28 mm
Weight	103g
Colour	White
AC connector	14V, 54mA typical
Power supply	12DCV, 60mA
Radio Parameters	Wi-Fi 802.11 (b/g/n) RF Frequency band: 2.4 GHz. <i>Consult annex 1 for further information</i> Output power (average): 8 dBm (<i>Modulated signal at antenna chip; 11Mb/Sec.</i>)
Mounting	Wall
LED indicators	1 x Device status
Operating Temperature	From 0°C to 40°C
Operating humidity	<93% HR, no condensation
Stock humidity	<93% HR, no condensation
RoHS conformity	Compliant with RoHS2 directive (2011/65/CE).

Table 3.1 Technical features

Annex 1

The device can be configured in 3 different RF Modes:

- USA: 2412 – 2462 MHz (11 channels)
- Europe: 2412 – 2472 MHz (13 channels)
- Japan: 2412 – 2484 MHz (14 channels)

The factory settings are set to work in the most restrictive mode, USA: 2412 – 2462 MHz. Therefore, if the user doesn't change any of these parameters, the gateway is compliant with the most restrictive RF regulations, stricter than European's.