



06243-680917


www.alarmvideo.de

Applicable camera (model)

For Security Vari-Focal

MP MEGA PIXELS

YV2.8x2.8SA-SA2



2.8x



VARI Vari-Focal

WIDE Wide Angle

3 Mega For Megapixel Camera

DC DC Auto Iris

CS-mt CS Mount

METAL Metal Mount


ND ND Filter

230 Long Cable

AIT Aspherical Lens


F1.2 Wide Aperture Rate

- High image-quality monitoring with optical performance supporting 3 megapixels.
- WIDE 2.8mm, achieving a horizontal field angle of 100 degrees (when used on 1/3 cameras).
- Compact and lightweight design, best suited for use with dome cameras.
- Designed to maximize optical performance with high-accuracy aspheric lens, low-dispersion glass, and high refractive-index glass.
- Built-in ND filter of T360, supporting high sensitivity cameras.

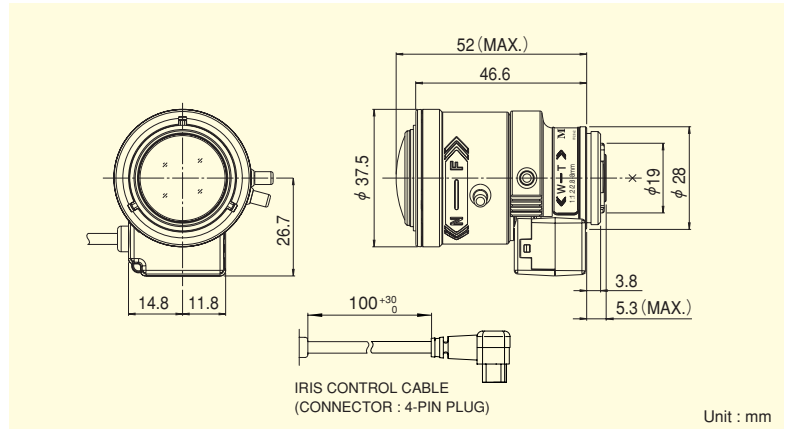

MEGAPIXEL VARI-FOCAL LENSES MP

Focal Length (mm)		2.8~8 (2.8x)	
Iris Range		F1.2 ~ T360 (Equivalent to F360)	
Operation	Zoom	Manual	
	Focus	Manual	
	Iris	Auto (DC Type) (*1)	
Angle Of View (HxV)	1/3"	WIDE	100°00' X 73°45'
		TELE	35°03' X 26°18'
	1/4"	WIDE	73°45' X 54°49'
		TELE	26°18' X 19°44'
Focusing Range (From Front Of The Lens) (m)		∞ ~ 0.3	
Object Dimensions at M.O.D. (HxV) (mm)	1/3"	WIDE	744 X 468
		TELE	197 X 146
	1/4"	WIDE	468 X 323
		TELE	146 X 108
Back Focal Distance (in air) (mm)		7.70	
Exit Pupil Position (From Image Plane) (mm)		314	
Filter Thread (mm)		—	
Mount		CS	
Mass (g)		50	
Coil Resistance		Drive Coil	190Ω
		Damping Coil	500Ω
Current Consumption		23mA (Max.) at DC 4V	
Remarks		• With Metal Mount (*1) When power is turned off, iris will automatically close. YV2.8x2.8SA-SA2L : Long Cable Type (230mm)	

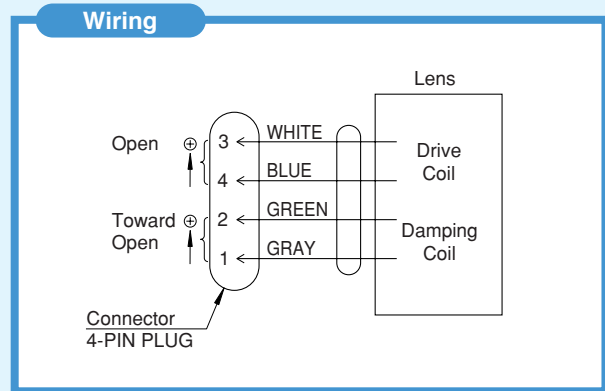

[Lens Image]

