




























 <p>aco</p> <p>1 2 3</p> <p>4 5</p>	<p>1</p> 	<p>2</p> 	<p>3</p> 	<p>4 5</p> 
	<p>1 INTERCOM</p>  <p>x2</p>	<p>3s</p> <p>F2</p> <p>1s</p> 	<p>3 AUTO OPEN</p>  <p>3s</p>	<p>4</p> 

<p>audio</p> 				 <p>halo</p>	 <p>halo</p>	 <p>halo</p>	 <p>halo</p>
<p>Intercom</p>  <p>2</p> <p>1</p>		 <p>x2</p>			 <p>halo</p>	 <p>halo</p>	 <p>halo</p>



# aco

PRODUCENT / PRODUCER / HERSTELLER / PRODUCTEUR

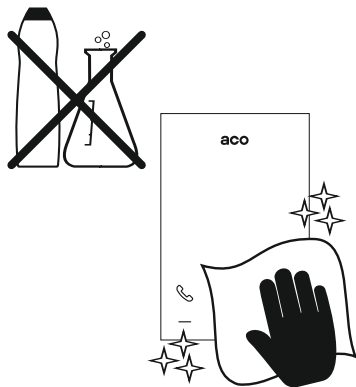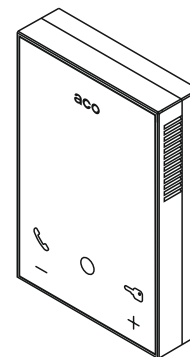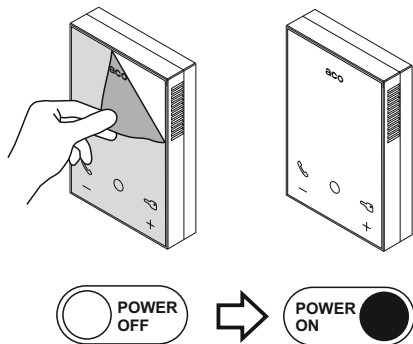**ACO Sp. z o.o. sp. komandytowa**

ul. Diamentowa 7 62-002 Suchy Las, Poland

tel. +48 61 843 93 71

tel. +48 61 641 96 86

bok@aco.com.pl

export@aco.com.pl

[www.aco.com.pl](http://www.aco.com.pl)



Instrukcje oraz więcej informacji dostępne również na:

Instructions and more information also available on:

Instruktionen und weitere Informationen auch verfügbar auf:

[www.support.aco.com.pl](http://www.support.aco.com.pl)

**audio**

UP800

WZORNIK MOCOWANIA  
DRILLING TEMPLATE  
BOHRSCHABLONE  
GABARIT DE PERÇAGE

~ 150 cm

**A/B**

**A**

blue	green	blue	orange	red	red	MAX 24V/2A	F2
LINE	(GND)	POWLER	POWLER	POWLER	RING	F2	F2

**B**

UTP cat 5e/6 RJ45 1568B

1. orange - white	-DC POWER	Power
2. orange	+DC POWER	
3. green - white	LINE -	
4. blue	V+ (V1+)	Video
5. blue - white	V- (V1-)	
6. green	LINE +	
7. brown - white	-DC POWER	Power
8. brown	+DC POWER	

**DZWONEK DO DRZWI**  
DOOR BELL  
TÜRGLÖCKE  
CLOCHETTE DE PORTE

≤ 20Ω

-DC POWER RING

**F2** 2A/24VDC

**F2 =**

**A/B**

**A**

PRO I/O-80 (CS)

**B**

3s

15s

\* Change time by PRO 3 MANAGER

**LINE TERM.**

OFF

ON

**b1**

**SET MONITOR ADDRESS**

Address: 1

ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1	2	4	8	16	32	64	112	128	M
CODE / ADDRESS			INTERCOM						

Address: 3 (1+2)

ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1	2	4	8	16	32	64	112	128	M
CODE / ADDRESS			INTERCOM						

Address: 46 (2+4+8+32)

ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1	2	4	8	16	32	64	112	128	M
CODE / ADDRESS			INTERCOM						

Address: ALL (0)

ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1	2	4	8	16	32	64	112	128	M
CODE / ADDRESS			INTERCOM						

**SET INTERCOM ADDRESS**

**ALL**

ON	OFF	OFF	OFF
1	112	128	M
INTERCOM			

**1**

ON	OFF	OFF	OFF
1	112	128	M
INTERCOM			

**2**

ON	OFF	OFF	OFF
1	112	128	M
INTERCOM			

**3**

ON	OFF	OFF	OFF
1	112	128	M
INTERCOM			

**SET INTERCOM MODE**

Global Intercom (not related to monitor address)

Internal Intercom (related to monitor address) only 1 and 2

**SET INTERCOM CALL ADDRESS**

Only by PRO 3 Manager




**CLICK!**

**1**


$R_x \leq 40\Omega$

$x = \max 300m$ : UTP Cat. 5e / 6

$x > 300m$ : UTP Cat. 5e/6 + POWER 15VDC

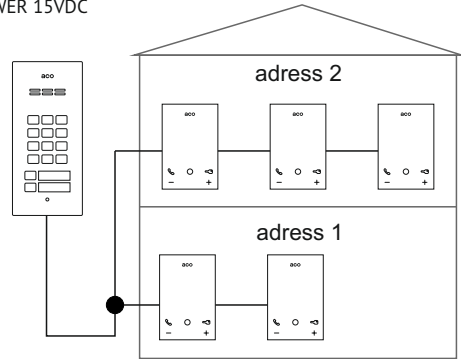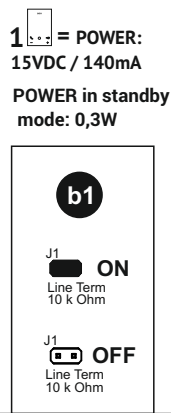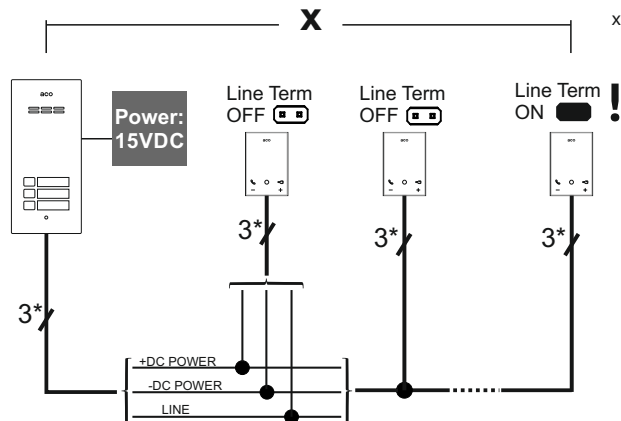

\* min. 3 x 0,5 mm or UTP Cat. 5e/6

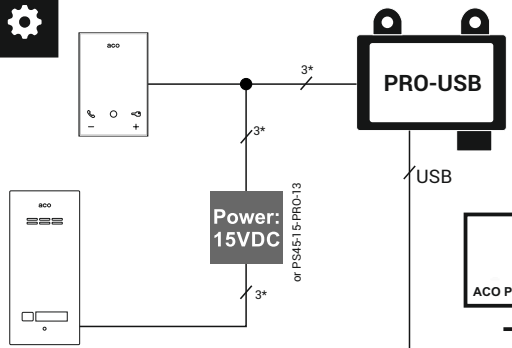


**Aplikacja komputerowa**  
**ACO PRO 3 Manager:**  
 - Aktualizacja Firmware  
 - Pełne ustawienia

**Computer application**  
**ACO PRO 3 Manager:**  
 - Firmware update  
 - Full settings

**Computeranwendung**  
**ACO PRO 3 Manager:**  
 - Firmware aktualisieren  
 - volle Einstellungen

**Application pour ordinateur**  
**ACO PRO 3 Manager:**  
 - Mise à jour du firmware  
 - Paramètres complets



**Pobierz z :**  
**Download from:**  
**Herunterladen von:**  
**Télécharger de:**

[www.aco.com.pl/pro3manager/](http://www.aco.com.pl/pro3manager/)

\* min. 3 x 0,5 mm or UTP Cat. 5e/6

**aco**

PRODUCENT / PRODUCER / HERSTELLER / PRODUCTEUR

**ACO Sp. z o.o. sp. komandytowa**

ul. Diamentowa 7 62-002 Suchy Las, Poland

tel. +48 61 843 93 71

tel. +48 61 641 96 86

bok@aco.com.pl

export@aco.com.pl

[www.aco.com.pl](http://www.aco.com.pl)

Instrukcje oraz więcej informacji dostępne również na:

Instructions and more information also available on:

Instruktionen und weitere Informationenauch verfügbar auf:

[www.support.aco.com.pl](http://www.support.aco.com.pl)

